


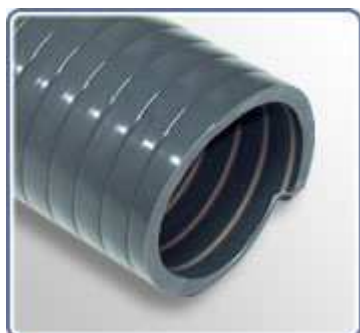

Sawage hose - Grey

Temperature range

-15° C - +60° C

Features

Plasticized PVC hose with super elastic material, incorporated reinforcement of anti-shock rigid PVC spiral. Inside surface smooth, light corrugation outside. Very strong and flexible, is resistant to crushing, abrasion, to atmospheric agents and to most chemicals.

Applications

Irrigation, sink, sparging. Due to the high flexibility, is highly recommended for use on tank trucks.

Internal diameter [mm]	Weight [g/m]	Wall thickness [mm]	Bend radius [mm]	Working pressure [bar]	Max. pressure [bar]	Vacuum [m/H ₂ O]	Package [m]	Package Size [m ³]
20	310	3,6	80	7	21	10	30	0,046
25	410	3,8	100	7	21	10	30	0,059
30	550	4,0	120	7	21	10	30	0,074
32	600	4,0	130	7	21	10	30	0,083
35	630	4,2	140	6	18	10	30	0,107
38	700	4,4	155	6	18	10	30	0,127
40	730	4,5	160	6	18	10	30	0,149
45	850	4,5	180	6	18	10	30	0,176
50	1000	4,8	200	5	15	10	30	0,207
60	1250	5,0	240	4,5	13,5	9	30	0,288
63	1390	5,2	260	4,5	13,5	9	30	0,288
70	1600	5,5	280	4,5	13,5	9	30	0,388
76	1700	5,5	310	4	12	9	30	0,417
80	1850	6,3	320	3,5	10,5	9	30	0,454
90	2150	6,3	360	3,5	10,5	9	30	0,689
100	2700	6,7	410	3	9	8,5	30	0,820
110	3000	7,0	450	3	9	8,5	30	0,995
120	3350	7,5	480	2,5	7,5	8	30	1,156
127	3600	7,5	510	2,5	7,5	8	30	1,243
150	5000	9,0	610	2	6	8	20	1,360
160	5600	9,5	650	2	6	7	20	1,500