

“EUROMODEL” INDEXED CLAMPING LEVER WITH PLASTIC PUSH BUTTON AND STAINLESS STEEL THREADED STUD

INOX



MATERIAL:

Special high resistance glass fiber reinforced technopolymer.
Oils and greases resistant.

SURFACE:

Satin.

LEVER BODY AND INSERT COLOUR:

Black (RAL 9011).

MAIN INSERT:

Stainless steel threaded stud. (AISI 303).

PUSH BUTTON:

Push button in black polyamide (RAL 9011).

SPRING:


Stainless steel spring. (AISI 303).

ALTERNATIVE COLOURS FOR LEVER BODY AND BUTTON:

- Orange (RAL 2004 cod. 02).
- Blue (RAL 5015 cod. 07).
- Yellow (RAL 1021 cod.10).
- Red (RAL 3000 cod.16).
- Green (RAL 6024 cod.17).
- Grey (RAL 7035 code 13).

SPECIAL REQUESTS:

- It is possible to supply the inserts with different lengths, on request and for quantities.
- It is possible to supply the lever body and button with colours as shown in the table at page 27, on request and for quantities.

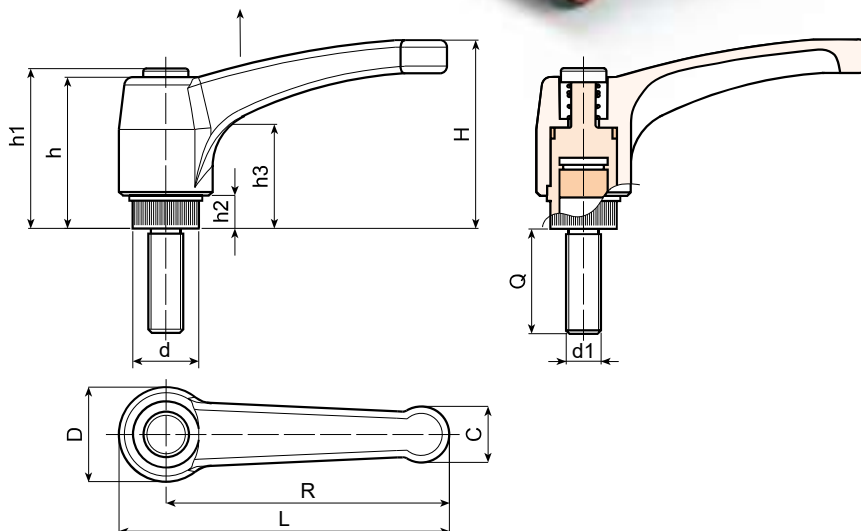

Art.	L	R	H	D	d	c	h	h1	h2	h3	d1	Q	Weight (gr)
A583-43 M04 CIN	51	43	33	17	11,5	9	29	32	6	18	M4	16-20-30	12-13-14
A583-43 M05 CIN	51	43	33	17	11,5	9	29	32	6	18	M5	16-20-30	13-14-15
A583-43 M06 CIN	51	43	33	17	11,5	9	29	32	6	18	M6	16-20-30-40	17-18-20-22
A583-52 M06 CIN	62	52	41	22	15	12	36	39	8	23	M6	16-20-30-40	25-26-28-30
A583-52 M08 CIN	62	52	41	22	15	12	36	39	8	23	M8	16-20-30-40	27-28-31-33
A583-52 M10 CIN	62	52	41	22	15	12	36	39	8	23	M10	16-20-30-40	33-35-40-45
A583-65 M06 CIN	76	65	43	23	15	13	36	39	8	24	M6	16-20-30-40	28-29-31-32,5
A583-65 M08 CIN	76	65	43	23	15	13	36	39	8	24	M8	16-20-30-40	33-35-38-41
A583-65 M10 CIN	76	65	43	23	15	13	36	39	8	24	M10	16-20-30-40	39-41-46-51
A583-80 M08 CIN	93	80	54	27	19	15,5	44	47	8,5	29	M8	16-20-30-40-50	46-49-51-54-57
A583-80 M10 CIN	93	80	54	27	19	15,5	44	47	8,5	29	M10	20-30-40-50	56-61-66-71
A583-80 M12 CIN	93	80	54	27	19	15,5	44	47	8,5	29	M12	20-30-40-50	68-75-82-89
A583-94 M08 CIN	109	94	56	30	19	18	45	48	9	30	M08	20-30-40-50	52-55-58-61
A583-94 M10 CIN	109	94	56	30	19	18	45	48	9	30	M10	20-30-40-50	63-68-73-78
A583-94 M12 CIN	109	94	56	30	19	18	45	48	9	30	M12	20-30-40-50	75-82-89-96
+ A583-108 M12 CIN	125	108	65	34	24	21	51	55	10	35	M12	20-30-40-50	-
+ A583-108 M14 CIN	125	108	65	34	24	21	51	55	10	35	M14	20-30-40-50	-
+ A583-108 M16 CIN	125	108	65	34	24	21	51	55	10	35	M16	20-30-40-50	-

+ Available from December 2004