




Agroflat

**Excellent resistant flat hose,
made of rubber, double layer of
polyester insert**

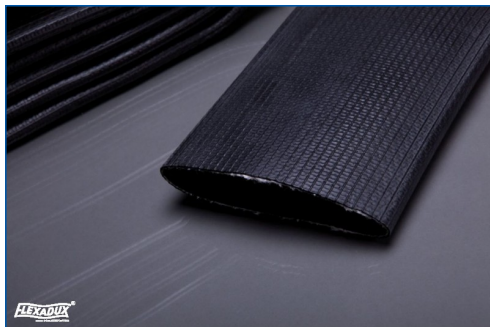

Material:

Specially-formulated black nitrile rubber, double layer. Polyester thread insert, black

Single length:

50 m

Temperature Resistance:

- 30° C to +80° C

Applications:

Motopump discharge for high pressure, irrigation systems delivery in agriculture, construction, civil and industrial works, protection for tubing and cables

Properties:

excellent resistance to abrasion and intensive use by professionals, highly resistant to oil, gasoline and a wide range of chemicals, very resistant to both contact and radiant heat

Stand:

23.10.2019

TECHNICAL DATA

Dia. (mm)	Thickness (mm)	Weight (g/m)	max. Work.Press. (bar)	max. Burst Press. (bar)
20	2,20	230	30	90
22	2,20	240	30	90
25	2,10	250	30	90
32	2,10	310	25	80
38	2,10	345	20	62
42	2,10	395	20	62
45	2,10	410	20	62
52	2,10	460	20	60
55	2,10	470	20	52
64	2,20	600	17	52
70	2,20	680	17	50
75	2,20	790	17	50
80	2,40	810	17	50
90	2,40	930	17	50
102	2,50	1030	17	50
110	2,50	1160	15	45
115	125	1180	15	45
125	2,70	1400	15	45
152	2,70	1650	15	45
204	3,80	3100	12	35
254	4,00	4000	10	30
304	4,00	4700	10	25

Further diameters available upon request!

Technical data are based on + 23° C.



SCHAUENBURG RUHRKUNSTSTOFF GMBH

Weseler Str. 35 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 2 08 99 91-0 · Fax +49 (0) 2 08 5 33 74 · mail@schauenburg-rk.com