










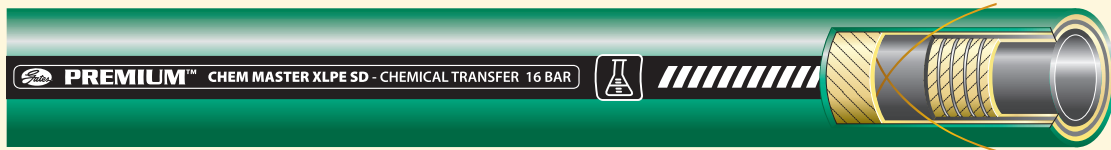


Acid-Chemical Hoses

PREMIUM™ CHEM MASTER XLPE SD



								
mm	mm	mm	Bar	Bar	mm	Kg/m	m	REF.
19	31	6	16	48	95	0.7	40	4695-13001
25	37	6	16	48	125	0.8	40	4695-13002
32	44	6	16	48	160	1.0	40	4695-13003
38	51	6.5	16	48	190	1.2	40	4695-13004
50	66	8	16	48	250	2.1	40	4695-13005
51	67	8	16	48	255	2.2	40	4695-13006
65	81	8	16	48	325	2.6	40	4695-13007
75	91	8	16	48	375	3.1	40	4695-13008
76	92	8	16	48	380	3.1	40	4695-13009
100	116	8	16	48	500	4.1	40	4695-13010

RECOMMENDED FOR

Premium hose for tank truck, barge, ship, or storage tank transfer applications of a variety of chemical products. The hose contains a wire helix for full suction capability, as well as for routing hoses through tight bends. A heavy duty suction and discharge hose (SD) for use with various acids and chemicals.

TUBE

XLPE, black smooth

REINFORCEMENT

High tensile synthetic textile cord, steel wire helix and crossing anti-static wires

COVER

EPDM rubber, smooth, green. Extremely weather resistance cover.

TEMPERATURE

-20°C to +65°C

BURST PRESSURE

> 48 bar

BRANDING TRANSFER LABEL

PREMIUM™ CHEM MASTER XLPE SD - CHEMICAL TRANSFER 16 BAR

