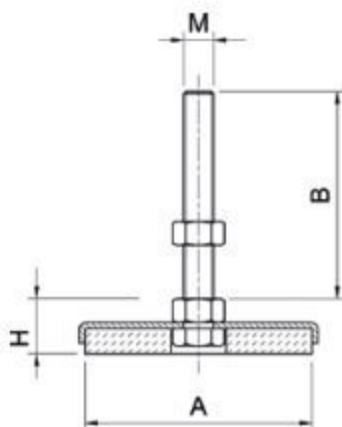


**TH**
**Piede Antivibrante con Stelo Fisso < 3000 kg**  
**Antivibration Mount with Fixed Spindle < 3000 kg**


COD.	A	M	B	H	Carico max Statico Max Load daN	
A4TH400	40	10MA	50	25	600	4
A4TH500	50	12MA	75	27	700	4
A4TH600	80	12MA	100	31	800	4
A4TH1200	120	16MA	100	35	1000	4
A4TH3000	160	20MA	150	36	2000	4

**ad esaurimento scorte**  
**until stocks last**

**Caratteristiche**
**MATERIALE BASE:** Acciaio zincato

**TIPO BASE:** Antivibrante

**CORREDO BASE:** Suola in NBR 80 shore

**MATERIALE STELO:** Acciaio zincato

**TIPO STELO:** Fisso

**CORREDO STELO:** Dado

**PRESENTAZIONE PRODOTTO:** Stelo fornito già assemblato alla base

**Product specification**
**BASE MATERIAL:** Zinc plated steel

**BASE TYPE:** Antivibration

**BASE OUTFIT:** Plate NBR 80 shore

**SPINDLE MATERIAL:** Zinc plated steel

**SPINDLE TYPE:** Fixed

**SPINDLE OUTFIT:** Nut

**PRODUCT PRESENTATION:** Spindle assembled to the base