















								
mm	mm	kg	COD.	mm	mm	daN								
40	18	0,01	381100	8	21	30								
50	20	0,02	381101	8	22	40								
60	24	0,04	381102	8	28	60								
75	24	0,05	381203	8	28	70								
80	24	0,07	381103	8	28	70								


Institutional brackets



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Swivel actions: double ball ring with grease lubrication
 - 5) King pin: integrated with the plate and cold-rieveted
- Available with front locking brakes


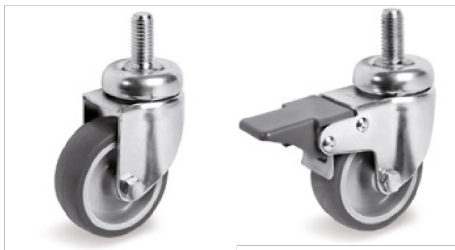
															
mm	mm	kg	COD.	kg	COD.	kg	COD.	mm	mm	mm	mm	mm	mm	daN	
40	18	0,09	384200	0,10	385200	0,12	388200	59	42x42	30x30	5	24	78	30	
50	18	0,13	384201	0,14	385201	0,15	388201	66	55x55	40x40	6	24	78	40	
60	24	0,22	384202	0,19	385202	0,26	388202	82	60x60	45x45	6	21	83	60	
75	24	0,26	384303	0,22	385303	0,32	388303	101	60x60	45x45	6	25	91	70	
80	24	0,28	384203	0,24	385203	0,33	388203	104	60x60	45x45	6	25	91	70	

Supporti per collettività



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Swivel actions: double ball ring with grease lubrication
 - 5) King pin: integrated with the plate and cold-riveted
- Available with front locking brakes

mm	mm	kg	COD.	kg	COD.	mm	mm	mm	mm	mm	daN
40	18	0,08	383200	0,11	387200	59	35	10	24	78	30
50	18	0,10	383201	0,12	387201	66	35	10	24	78	40
60	24	0,19	383202	0,22	387202	82	41	12	21	83	60
75	24	0,23	383303	0,28	387303	101	41	12	25	91	70
80	24	0,24	383203	0,29	387203	104	41	12	25	91	70



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Galvanised steel threaded stem
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with front locking brakes

mm	mm	kg	COD.	kg	COD.	mm	mm	mm	mm	mm	daN
40	18	0,09	386200	0,12	389200	59	35	M8	15	24	30
50	18	0,11	386201	0,14	389201	66	35	M8	15	24	40
60	24	0,22	386202	0,26	389202	82	41	M12	25	21	60
75	24	0,26	386303	0,32	389303	101	41	M12	25	25	70
80	24	0,28	386203	0,33	389203	104	41	M12	25	25	70

Options available to order



Various dimensions stems



People make the difference