



















SERIES **52**

**BLACK RUBBER WHEELS
WITH POLYPROPYLENE CENTRE**




																		
mm	mm	kg	CODE	mm	mm	daN	daN	daN										
80	25	0.11	522101	12	39	150	50	65										
100	30	0.21	522102	12	44	200	75	80										
100	30	0.19	521132	12	39	200	75	80										
125	37.5	0.41	521103	15	44	225	85	110										
125	37.5	0.35	521133	12	39	225	85	110										
140	37.5	0.48	521104	15	44	250	95	120										
150	40	0.61	521111	15	44	275	100	130										
160	40	0.73	521110	20	59	300	120	150										
180	45	1.02	521105	20	59	350	130	180										
200	50	1.31	521106	20	59	400	140	225										
200	50	1.28	521206	25	59	400	140	225										
250	60	2.59	521108	25	75	500	175	300										




																		
mm	mm	kg	CODE	mm	mm	daN	daN	daN										
80	25	0.14	524101	12	39	150	50	65										
100	30	0.24	524102	12	44	200	75	80										
125	37.5	0.44	523103	15	44	225	85	110										
140	37.5	0.51	523104	15	44	250	95	120										
150	40	0.61	523111	15	44	275	100	130										
160	40	0.75	523110	20	59	300	120	150										
180	45	1.18	523105	20	59	350	130	180										
200	50	1.48	523106	20	59	400	140	225										
200	50	1.45	523206	25	59	400	140	225										
250	60	2.78	523108	25	75	500	175	300										

Light-duty brackets SL - max carrying capacity 110 daN



- 1) Plate in electrolytically galvanised printed steel plate
 - 2) Fork in electrolytically galvanised printed steel plate
 - 3) Ball Race Ring in electrolytically galvanised printed steel plate
 - 4) Swivel actions: on two ball race rings lubricated with grease
 - 5) Bracket closing king pin integrated with ball race ring
- Available with total front foot brake


mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	mm	daN
80	25	0.45	525801	0.44	526001	0.57	526301	110	95x80	100x85	80x60	8.8	33	120	65
100	30	0.54	525802	0.53	526002	0.68	526302	127	95x80	100x85	80x60	8.8	29	120	80
125	37.5	0.78	525803	0.76	526003	0.89	526303	154	95x80	100x85	80x60	8.8	32	120	110



- 1) Plate in electrolytically galvanised printed steel plate
 - 2) Fork in electrolytically galvanised printed steel plate
 - 3) Ball Race Ring in electrolytically galvanised printed steel plate
 - 4) Bracket closing king pin integrated with ball race ring
 - 5) Swivel actions: on two ball race rings lubricated with grease
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	daN				
80	25	0.40	526101	0.50	526201	110	63	12	33	120	65				
100	30	0.49	526102	0.60	526202	127	63	12	29	120	80				
125	37.5	0.72	526103	0.82	526203	154	63	12	32	120	110				

Standard-duty brackets NL - max carrying capacity 300 daN



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Dust seal: orange polyethylene
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake

mm		kg		CODE		kg		CODE		mm		mm		mm		mm		daN
80	25	0.64	524401	0.36	525701	0.82	525201	107	100x85	80x60	9	37	120	65				
100	30	0.73	524402	0.48	525702	0.88	525202	128	100x85	80x60	9	35	120	80				
125	37.5	1.06	524403	0.71	525703	1.20	525203	156	100x85	80x60	9	37	120	110				
140	37.5	1.18	524404	0.80	525704	1.32	525204	177	100x85	80x60	9	34	120	120				
150	40	1.31	524411	0.93	525711	1.45	525211	182	100x85	80x60	9	34	120	130				
160B	40	1.41	524412	1.25	525712			187	100x85	80x60	9	50		150				
160	40	2.10	524410	1.73	525710	2.38	525210	199	140x110	105x80	11	56	156	150				
180	45	2.40	524405	2.11	525705	2.69	525205	219	140x110	105x80	11	56	156	180				
200	50	2.72	524406	2.50	525706	3.00	525206	240	140x110	105x80	11	56	156	225				
250	60	6.02	524708	4.52	525708			296	200x160	160x120	14	87		300				

80	25	0.69	524601	0.39	525901	0.86	525221	107	100x85	80x60	9	37	120	65				
100	30	0.78	524602	0.51	525902	0.93	525222	128	100x85	80x60	9	35	120	80				
125	37.5	1.09	524603	0.73	525903	1.24	525223	156	100x85	80x60	9	37	120	110				
140	37.5	1.20	524604	0.82	525904	1.35	525224	177	100x85	80x60	9	34	120	120				
150	40	1.31	524611	0.93	525911	1.45	525231	182	100x85	80x60	9	34	120	130				
160B	40	1.43	524612	1.23	525912			187	100x85	80x60	9	50		150				
160	40	2.18	524610	1.75	525910	2.47	525230	199	140x110	105x80	11	56	156	150				
180	45	2.40	524605	2.27	525905	2.68	525225	219	140x110	105x80	11	56	156	180				
200	50	2.76	524606	2.67	525906	3.04	525226	240	140x110	105x80	11	56	156	225				
250	60	6.12	524908	4.70	525908			296	200x160	160x120	14	87		300				

Options available to order:



Bracket with rear brake
d. 150-200 mm




Bracket with directional lock
d. 80-125 mm



Directional lock for brackets
d. 150-200 mm

Standard-duty brackets NL - max carrying capacity 300 daN

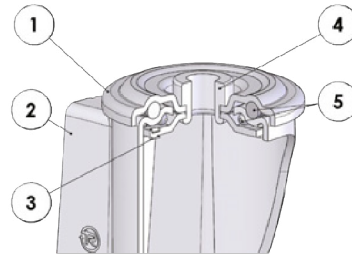


- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) King pin: bushing in electrolytically galvanised steel
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	mm	mm	daN			
80	25	0.55	527701	0.68	525601	107	73	12	37	120			65				
100	30	0.68	527702	0.75	525602	128	73	12	35	120			80				
125	37.5	0.96	527703	1.10	525603	156	73	12	37	120			110				
140	37.5	1.12	527704	1.26	525604	177	73	12	34	120			120				
150	40	1.25	527711	1.39	525611	182	73	12	34	120			130				
160	40	1.44	527710	1.73	525610	193	102	20	56	156			150				
180	45	2.28	527705	2.57	525605	214	102	20	56	156			180				
200	50	2.62	527706	2.91	525606	236	102	20	56	156			225				
80	25	0.58	527901	0.70	525621	107	73	12	37	120			65				
100	30	0.71	527902	0.78	525622	128	73	12	35	120			80				
125	37.5	1.08	527903	1.23	525623	156	73	12	37	120			110				
140	37.5	1.19	527904	1.34	525624	177	73	12	34	120			120				
150	40	1.35	527911	1.50	525631	182	73	12	34	120			130				
160	40	1.47	527910	1.75	525630	193	102	20	56	156			150				
180	45	2.44	527905	2.73	525625	214	102	20	56	156			180				
200	50	2.80	527906	3.08	525626	236	102	20	56	156			225				

SERIES **52**

**BLACK RUBBER WHEELS
WITH POLYPROPYLENE CENTRE**

Standard-duty brackets NL - max carrying capacity 300 daN



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Solid stem: galvanised steel
 - 5) King pin: bushing in galvanised steel
 - 6) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

mm		kg	CODE	kg	CODE	mm					mm	daN			
100	30	1.68	529202	1.75	529302	128	73	22	47	35	120	80			
125	37.5	1.96	529203	2.10	529303	156	73	22	47	37	120	110			
150	40	2.25	529211	2.39	529311	182	73	22	47	34	120	130			
160	40	1.81	529210	2.01	529310	193	102	26	56	56	156	150			
160	40	2.44	525520	2.73	525620	193	102	40	86	56	156	150			
200	50	2.99	529206	3.28	529306	236	102	26	56	56	156	225			
200	50	3.62	525516	3.91	525616	236	102	40	86	56	156	225			