

SERIES **53**

**BLACK RUBBER WHEELS  
WITH PRESSED STEEL DISCS**



mm	mm	kg	CODE	mm	mm	daN	daN	daN									
80	25	0.17	531121	12	39	<b>260</b>	<b>50</b>	<b>65</b>									
100	30	0.28	531122	12	44	<b>300</b>	<b>75</b>	<b>80</b>									
100	30	0.25	531132	12	39	<b>300</b>	<b>75</b>	<b>80</b>									
125	37.5	0.51	531103	15	44	<b>330</b>	<b>85</b>	<b>130</b>									
125	37.5	0.44	531133	12	39	<b>330</b>	<b>85</b>	<b>130</b>									
140	37.5	0.64	531104	15	44	<b>340</b>	<b>95</b>	<b>150</b>									
150	40	0.73	531111	15	44	<b>350</b>	<b>100</b>	<b>170</b>									
160	40	1.00	531110	20	58	<b>370</b>	<b>120</b>	<b>180</b>									
180	45	1.33	531105	20	58	<b>390</b>	<b>130</b>	<b>200</b>									
200	50	1.75	531106	20	58	<b>410</b>	<b>140</b>	<b>230</b>									
200	50	1.74	531206	25	58	<b>410</b>	<b>140</b>	<b>230</b>									
225	50	2.16	531107	20	58	<b>420</b>	<b>160</b>	<b>250</b>									
250	60	3.24	531108	25	73	<b>500</b>	<b>175</b>	<b>300</b>									
280	60	3.92	531109	25	73	<b>550</b>	<b>200</b>	<b>390</b>									




mm	mm	kg	CODE	mm	mm	daN	daN	daN									
80	25	0.19	533121	12	39	<b>260</b>	<b>50</b>	<b>65</b>									
100	30	0.31	533122	12	44	<b>300</b>	<b>75</b>	<b>80</b>									
125	37.5	0.54	533103	15	44	<b>330</b>	<b>85</b>	<b>130</b>									
140	37.5	0.66	533104	15	44	<b>340</b>	<b>95</b>	<b>150</b>									
150	40	0.76	533111	15	44	<b>350</b>	<b>100</b>	<b>170</b>									
160	40	1.07	533110	20	58	<b>370</b>	<b>120</b>	<b>180</b>									
180	45	1.39	533105	20	58	<b>390</b>	<b>130</b>	<b>200</b>									
200	50	1.81	533106	20	58	<b>410</b>	<b>140</b>	<b>230</b>									
200	50	1.78	533206	25	58	<b>410</b>	<b>140</b>	<b>230</b>									
225	50	2.42	533107	20	58	<b>420</b>	<b>160</b>	<b>250</b>									
250	60	3.14	533108	25	73	<b>500</b>	<b>175</b>	<b>300</b>									
280	60	3.84	533109	25	73	<b>550</b>	<b>200</b>	<b>390</b>									

Options available to order:




Wheel with antistatic rubber tread (pages 352-355)

**Light-duty brackets SL - max carrying capacity 130 daN**



- 1) Plate in electrolytically galvanised printed steel plate
  - 2) Fork in electrolytically galvanised printed steel plate
  - 3) Ball Race Ring in electrolytically galvanised printed steel plate
  - 4) Swivel actions: on two ball race rings lubricated with grease
  - 5) Bracket closing king pin integrated with ball race ring
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	mm	daN
80	25	0.51	535801	0.50	536001	0.63	536301	110	95x80	100x85	80x60	8.8	33	120	<b>65</b>
100	30	0.60	535802	0.59	536002	0.74	536302	127	95x80	100x85	80x60	8.8	29	120	<b>80</b>
125	37.5	0.87	535803	0.85	536003	0.98	536303	154	95x80	100x85	80x60	8.8	32	120	<b>130</b>




- 1) Plate in electrolytically galvanised printed steel plate
  - 2) Fork in electrolytically galvanised printed steel plate
  - 3) Ball Race Ring in electrolytically galvanised printed steel plate
  - 4) Bracket closing king pin integrated with ball race ring
  - 5) Swivel actions: on two ball race rings lubricated with grease
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	daN
80	25	0.46	536101	0.56	536201	110	63	12	33	120	<b>65</b>
100	30	0.55	536102	0.66	536202	127	63	12	29	120	<b>80</b>
125	37.5	0.81	536103	0.91	536203	154	63	12	32	120	<b>130</b>

SERIES **53**

**BLACK RUBBER WHEELS  
WITH PRESSED STEEL DISCS**

**Standard-duty brackets NL - max carrying capacity 390 daN**



- 1) Plate: electrolytically galvanised steel plate
  - 2) Fork: electrolytically galvanised steel plate
  - 3) Ball race ring: electrolytically galvanised steel plate
  - 4) Dust seal: orange polyethylene
  - 5) Swivel actions: double ball ring with grease lubrication
  - 6) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake

mm		kg	CODE	kg	CODE	kg	CODE	mm						daN
80	25	0.69	535001	0.49	535701	0.87	535401	107	100x85	80x60	9	37	120	65
100	30	0.82	535002	0.62	535702	1.00	535402	128	100x85	80x60	9	35	120	80
125	37.5	1.18	535003	0.92	535703	1.30	535403	156	100x85	80x60	9	37	120	130
140	37.5	1.27	535004	1.09	535704	1.46	535404	177	100x85	80x60	9	34	120	150
150	40	1.40	535011	1.22	535711	1.57	535411	182	100x85	80x60	9	34	120	170
160B	40	1.75	535012	1.55	535712			187	100x85	80x60	9	50		180
160	40	2.44	535010	2.07	535710	2.69	535410	199	140x110	105x80	11	56	156	180
180	45	2.78	535005	2.49	535705	3.07	535405	219	140x110	105x80	11	56	156	200
200	50	3.25	535006	2.89	535706	3.39	535406	240	140x110	105x80	11	56	156	230
225	50	3.67	535007	3.18	535707	3.95	535407	263	140x110	105x80	11	56	156	250
250	60	6.66	534708	5.16	535708			296	200x160	160x120	14	87		300
280	60	7.35	534709	5.84	535709			311	200x160	160x120	14	87		390

80	25	0.70	535101	0.51	535901	0.89	535421	107	100x85	80x60	9	37	120	65
100	30	0.84	535102	0.65	535902	1.03	535422	128	100x85	80x60	9	35	120	80
125	37.5	1.21	535103	0.95	535903	1.33	535423	156	100x85	80x60	9	37	120	130
140	37.5	1.34	535104	0.96	535904	1.49	535424	177	100x85	80x60	9	34	120	150
150	40	1.45	535111	1.07	535911	1.60	535431	182	100x85	80x60	9	34	120	170
160B	40	1.81	535112	1.61	535912			187	100x85	80x60	9	50		180
160	40	2.50	535110	2.13	535910	2.75	535430	199	140x110	105x80	11	56	156	180
180	45	2.85	535105	2.56	535905	3.13	535425	219	140x110	105x80	11	56	156	200
200	50	3.31	535106	3.05	535906	3.45	535426	240	140x110	105x80	11	56	156	230
225	50	3.93	535107	3.45	535907	4.22	535427	263	140x110	105x80	11	56	156	250
250	60	6.56	534908	5.06	535908			296	200x160	160x120	14	87		300
280	60	7.27	534909	5.76	535909			311	200x160	160x120	14	87		390

**Options available to order:**



Wheel with antistatic rubber tread (pages 352-355)



Bracket with rear brake d. 150-200 mm




Bracket with directional lock d. 80-125 mm



Directional lock for brackets d. 150-200 mm

**Standard-duty brackets NL - max carrying capacity 230 daN**

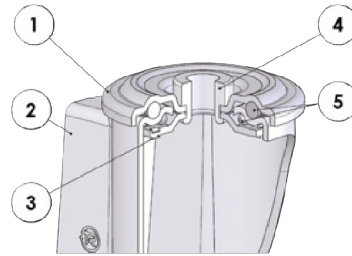

- 1) Plate: electrolytically galvanised steel plate
  - 2) Fork: electrolytically galvanised steel plate
  - 3) Ball race ring: electrolytically galvanised steel plate
  - 4) King pin: bushing in electrolytically galvanised steel
  - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	daN						
80	25	0.61	537701	0.78	538201	107	73	12	37	120	65						
100	30	0.74	537702	0.94	538202	128	73	12	35	120	80						
125	37.5	1.09	537703	1.24	538203	156	73	12	37	120	130						
140	37.5	1.23	537704	1.38	538204	177	73	12	34	120	150						
150	40	1.35	537711	1.49	538211	182	73	12	34	120	170						
160	40	1.78	537710	2.04	538210	193	102	20	56	156	180						
180	45	2.66	537705	3.95	538205	214	102	20	56	156	200						
200	50	3.16	537706	3.29	538206	236	102	20	56	156	230						
80	25	0.63	537901	0.80	538221	107	73	12	37	120	65						
100	30	0.76	537902	0.96	538222	128	73	12	35	120	80						
125	37.5	1.12	537903	1.27	538223	156	73	12	37	120	130						
140	37.5	1.26	537904	1.41	538224	177	73	12	34	120	150						
150	40	1.38	537911	1.52	538231	182	73	12	34	120	170						
160	40	1.85	537910	2.10	538230	193	102	20	56	156	180						
180	45	2.73	537905	3.01	538225	214	102	20	56	156	200						
200	50	3.22	537906	3.35	538226	236	102	20	56	156	230						

Options available to order:




Wheel with antistatic rubber tread (pages 352-355)

SERIES **53**

**BLACK RUBBER WHEELS  
WITH PRESSED STEEL DISCS**

**Standard-duty brackets NL - max carrying capacity 230 daN**



- 1) Plate: electrolytically galvanised steel plate
  - 2) Fork: electrolytically galvanised steel plate
  - 3) Ball race ring: electrolytically galvanised steel plate
  - 4) Solid stem: galvanised steel
  - 5) King pin: bushing in galvanised steel
  - 6) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	mm	mm	daN					
100	30	1.74	539202	2.24	538802	128	73	22	47	35	120	<b>80</b>							
125	37.5	2.09	539203	2.24	538803	156	73	22	47	37	120	<b>130</b>							
150	40	2.35	539211	2.49	538811	182	73	22	47	34	120	<b>170</b>							
160	40	2.15	539210	2.41	538810	193	102	26	56	56	156	<b>180</b>							
160	40	3.20	535520	3.50	535620	193	102	40	86	56	156	<b>180</b>							
180	45	3.75	535515	3.95	535615	214	102	40	86	56	156	<b>200</b>							
200	50	3.53	539206	3.66	538806	236	102	26	56	56	156	<b>230</b>							
200	50	4.16	535516	4.29	535616	236	102	40	86	56	156	<b>230</b>							