





















SERIES **61**

**THERMOPLASTIC POLYURETHANE WHEELS
WITH POLYAMIDE 6 CENTRE**














																
mm	mm	kg	CODE	mm	mm	daN	daN	daN								
80	30	0.11	611101	12	39	160	75	75								
100	30	0.16	611102	12	44	200	120	120								
125	35	0.25	611103	15	44	350	180	180								
150	35	0.38	611105	15	44	400	220	230								
150	45	0.39	611104	20	59	450	240	250								
200	50	0.86	611106	20	59	500	300	300								




																
mm	mm	kg	CODE	kg	CODE	mm	mm	daN	daN	daN						
80	30	0.13	613101	0.13	613201	12	39	160	75	75						
100	30	0.18	613102	0.18	613202	12	44	200	120	120						
125	35	0.27	613103	0.27	613203	15	44	350	180	180						
150	35	0.40	613105	0.40	613205	15	44	400	220	230						
150	45	0.43	613104	0.43	613204	20	59	450	240	250						
200	50	0.92	613106	0.92	613206	20	59	500	300	300						



																
mm	mm	kg	CODE	kg	CODE	mm	mm.	daN	daN	daN	daN					
80	30	0.17	612201	0.17	612401	8	40	160	85	85	70					
100	30	0.21	612202	0.21	612402	8	45	200	120	120	100					
125	35	0.30	612203	0.30	612403	8	45	350	180	180	140					

Standard-duty brackets NL - max carrying capacity 300 daN



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Dust seal: orange polyethylene
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: integrated with the plate and cold-rieveted
- Available with total front foot brake

mm		mm		kg		CODE		kg		CODE		kg		CODE		mm		mm		mm		mm		mm		daN			
80	30	0.62	614201	0.38	615701	0.81	616601	107	100x85	80x60	9	37	120	75															
100	30	0.74	614202	0.43	615702	0.89	616602	128	100x85	80x60	9	35	120	120															
125	35	0.91	614203	0.66	615703	1.05	616603	156	100x85	80x60	9	37	120	180															
150	35	1.08	614204	0.80	615704	1.21	616604	182	100x85	80x60	9	34	120	220															
150	45	1.83	614211	1.46	615711	2.11	616611	194	140x110	105x80	11	56	156	250															
200	50	2.23	614206	1.81	615706	2.49	616606	240	140x110	105x80	11	56	156	300															
80	30	0.63	614501	0.41	615901	0.84	616621	107	100x85	80x60	9	37	120	75															
100	30	0.75	614502	0.43	615902	0.90	616622	128	100x85	80x60	9	35	120	120															
125	35	0.92	614503	0.67	615903	1.07	616623	156	100x85	80x60	9	37	120	180															
150	35	1.11	614504	0.82	615904	1.23	616624	182	100x85	80x60	9	34	120	220															
150	45	1.98	614511	1.51	615911	2.16	616631	194	140x110	105x80	11	56	156	250															
200	50	2.27	614506	1.86	615906	2.51	616626	240	140x110	105x80	11	56	156	300															
80	30	0.60	614701	0.48	614801	0.77	614901	107	100x85	80x60	9	37	120	85															
100	30	0.67	614702	0.53	614802	0.84	614902	128	100x85	80x60	9	35	120	120															
125	35	0.82	614703	0.66	614803	1.02	614903	156	100x85	80x60	9	37	120	180															

Options available to order:



Bracket with directional lock d. 80-125 mm




Directional lock for brackets d. 150-200 mm

SERIES **61**

**THERMOPLASTIC POLYURETHANE WHEELS
WITH POLYAMIDE 6 CENTRE**

Standard-duty brackets NL - max carrying capacity 300 daN

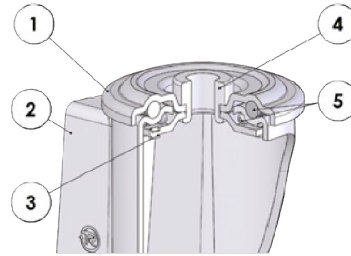

- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) King pin: bushing in electrolytically galvanised steel
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake


mm		mm		kg		CODE		kg		CODE		mm		mm		mm		mm		mm		daN		4 km/h	
80	30	0.55	617701	0.73	616401	107	73	12	37	120	75														
100	30	0.67	617702	0.88	616402	128	73	12	35	120	120														
125	35	0.85	617703	1.00	616403	156	73	12	37	120	180														
150	35	1.01	617704	1.14	616404	182	73	12	34	120	220														
150	45	1.69	617711	1.98	616411	188	102	20	56	156	250														
200	50	2.13	617706	2.41	616406	236	102	20	56	156	300														
80	30	0.57	617801	0.75	616421	107	73	12	37	120	75														
100	30	0.68	617802	0.88	616422	128	73	12	35	120	120														
125	35	0.87	617803	1.02	616423	156	73	12	37	120	180														
150	35	1.03	617804	1.16	616424	182	73	12	34	120	220														
150	45	1.74	617811	2.03	616431	188	102	20	56	156	250														
200	50	2.18	617806	2.46	616426	236	102	20	56	156	300														
80	30	0.56	614301	0.72	615501	107	73	12	37	120	85														
100	30	0.61	614302	0.78	615502	128	73	12	35	120	120														
125	35	0.79	614303	0.96	615503	156	73	12	37	120	180														

Options available to order:




Fitting with threaded stem

Standard-duty brackets NL - max carrying capacity 300 daN



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Stem: zamak expander
 - 5) King pin: bushing in electrolytically galvanised steel
 - 6) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN
80	30	0.67	619201	0.85	619301	109	20	65	20-24	37	120	75
100	30	0.79	619202	1.00	619302	130	20	65	20-24	35	120	120
125	35	0.97	619203	1.12	619303	158	20	65	20-24	37	120	130




- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Solid stem: galvanised steel
 - 5) King pin: bushing in galvanised steel
 - 6) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN
100	30	1.67	616102	1.88	616202	128	73	22	47	35	120	120
125	35	1.85	616103	2.00	616203	156	73	22	47	37	120	180
150	35	2.01	616104	2.14	616204	182	73	22	47	34	120	220
150	45	2.69	616111	2.98	616211	188	102	26	56	56	156	250
200	50	3.13	616106	3.41	616206	236	102	26	56	56	156	300

Options available to order:



Bracket with Zamak stem fitted with wheels with roller bearings and single ball bearing d. 80-125 mm




Fitting with solid stem with customised dimensions

SERIES **61**

**THERMOPLASTIC POLYURETHANE WHEELS
WITH POLYAMIDE 6 CENTRE**

Standard-duty brackets NLX in stainless steel - max carrying capacity 300 daN

INOX




- 1) Plate: AISI 304 stainless steel
 - 2) Fork: AISI 304 stainless steel
 - 3) Ball race ring: AISI 304 stainless steel
 - 4) Dust seal: orange polyethylene
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake

mm		kg	CODE	kg	CODE	kg	CODE	mm					daN	4 km/h	
80	30	0.61	614401	0.35	615101	0.78	616701	107	100x85	80x60	9	37	120	75	
100	30	0.65	614402	0.40	615102	0.83	616702	128	100x85	80x60	9	35	120	120	
125	35	0.81	614403	0.64	615103	0.95	616703	156	100x85	80x60	9	37	120	180	
150	35	0.97	614404	0.81	615104	1.10	616704	182	100x85	80x60	9	34	120	220	
150	45	1.77	614411	1.33	615111	1.98	616711	194	140x110	105x80	11	56	156	250	
200	50	2.20	614406	1.71	615106	2.48	616706	240	140x110	105x80	11	56	156	300	
80	30	0.64	614601	0.38	615601	0.81	616721	107	100x85	80x60	9	37	120	75	
100	30	0.65	614602	0.41	615602	0.84	616722	128	100x85	80x60	9	35	120	120	
125	35	0.83	614603	0.66	615603	0.97	616723	156	100x85	80x60	9	37	120	180	
150	35	0.99	614604	0.83	615604	1.12	616724	182	100x85	80x60	9	34	120	220	
150	45	1.82	614611	1.38	615611	2.03	616731	194	140x110	105x80	11	56	156	250	
200	50	2.25	614606	1.74	615606	2.53	616726	240	140x110	105x80	11	56	156	300	
80	30	0.60	615401	0.48	615001	0.77	616901	107	100x85	80x60	9	37	120	85	
100	30	0.67	615402	0.53	615002	0.84	616902	128	100x85	80x60	9	35	120	120	
125	35	0.78	615403	0.66	615003	0.95	616903	156	100x85	80x60	9	37	120	180	

Standard-duty brackets NLX in stainless steel - max carrying capacity 300 daN

INOX



- 1) Plate: AISI 304 stainless steel
 - 2) Fork: AISI 304 stainless steel
 - 3) Ball race ring: AISI 304 stainless steel
 - 4) King pin: bushing in stainless steel
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN					
80	30	0.55	617901	0.72	618801	107	73	12	37	120	75						
100	30	0.61	617902	0.82	618802	128	73	12	35	120	120						
125	35	0.79	617903	0.94	618803	156	73	12	37	120	180						
150	35	0.90	617904	1.03	618804	182	73	12	34	120	220						
150	45	1.57	617911	1.85	618811	188	102	20	56	156	250						
200	50	2.14	617906	2.40	618806	236	102	20	56	156	300						
80	30	0.58	618001	0.75	618821	107	73	12	37	120	75						
100	30	0.62	618002	0.82	618822	128	73	12	35	120	120						
125	35	0.81	618003	0.96	618823	156	73	12	37	120	180						
150	35	0.92	618004	1.05	618824	182	73	12	34	120	220						
150	45	1.62	618011	1.90	618831	188	102	20	56	156	250						
200	50	2.46	618006	2.45	618826	236	102	20	56	156	300						
80	30	0.56	616301	0.72	616501	107	73	12	37	120	85						
100	30	0.61	616302	0.78	616502	128	73	12	35	120	120						
125	35	0.73	616303	0.88	616503	156	73	12	37	120	180						