


SERIES **63 AC**

**VULKOLLAN® WHEELS
WITH FORGED STEEL CENTRE**



mm	mm	kg	COD.	kg	COD.	mm	mm.	mm	mm	daN	daN	daN	daN
100	30	0,74	632122	0,67	634122	12	30	32	10	375	190	250	200
125	40	1,38	632123	1,31	634123	12	40	32	10	500	230	350	280
150	40	1,84	632124	1,66	634124	17	40	40	12	900	320	750	600
150	40	1,76	632224	1,60	634224	20	40	42	12	900	320	750	600
175	40	2,80	632125	2,56	634125	20	40	47	14	1200	340	850	680
200	50	4,03	632126	3,79	634126	20	50	47	14	1800	420	1100	880
200	50	4,00	632226	3,72	634226	25	50	52	15	1800	420	1100	880
250	60	8,03	632128	7,75	634128	25	60	52	15	2200	550	1500	1200

Standard-duty brackets NL - max carrying capacity 300 daN



- 1) Plate: electrolytically galvanised steel plate
- 2) Fork: electrolytically galvanised steel plate
- 3) Ball race ring: electrolytically galvanised steel plate
- 4) Dust seal: orange polyethylene
- 5) Swivel actions: double ball ring with grease lubrication
- 6) King pin: integrated with the plate and cold-riveted


mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	daN
100	30	1.26	637322	1.01	638222	128	100x85	80x60	9	35	200
125	40	2.03	637323	1.68	638223	156	100x85	80x60	9	37	220
150	40	2.54	637304	2.15	638214	182	100x85	80x60	9	34	220
150	40	3.21	637324	2.84	638224	194	140x110	105x80	11	56	300
175	40	4.18	637325	3.89	638225	217	140x110	105x80	11	56	300
200	50	5.43	637326	5.21	638226	240	140x110	105x80	11	56	300

Options available to order:



Footguard
for brackets NL-
M-P-PT


Medium-duty brackets M - max carrying capacity 500 daN



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electroplated galvanised steel
 - 4) Dust seal: blue polyethylene
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: integrated with the plate and cold-rieveted
- Available with adjustable total front foot brake

mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN
150	40	3.56	637404	2.84	638224	4.13	636704	194	140x110	105x80	11	58	178	500
200	50	5.82	637406	5.21	638226	6.18	636706	240	140x110	105x80	11	50	178	500

Medium-heavy duty brackets P - max carrying capacity 750 daN



- 1) Plate: galvanised colonial steel plate
 - 2) Fork: galvanised colonial steel plate
 - 3) Ball race ring: galvanised colonial steel plate
 - 4) Dust seal: orange polyamide
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: steel bolt in grade 8.8 steel and steel nut
- Available with total front foot brake


mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN	daN
100	30	1.61	637622	1.11	638622	1.75	636302	138	100x85	80x60	9	46	123	250	200
125	40	2.29	637623	1.76	638623	2.43	636303	161	100x85	80x60	9	44	123	350	280

Options available to order:



Footguard for brackets NL-M-P-PT



Heavy duty brackets P - max carrying capacity 750 daN



- 1) Plate: galvanised colonial steel plate
 - 2) Fork: galvanised colonial steel plate
 - 3) Ball race ring: galvanised colonial steel plate
 - 4) Dust seal: orange polyamide
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: steel bolt in grade 8.8 steel and steel nut
- Available with total adjustable rear foot brake

mm		kg		CODE		kg		CODE		mm		mm		mm		mm		daN		daN	
150	40	4.19	637624	2.70	638624	4.76	636304	200	140x110	105x80	11	70	126	4 km/h	6 km/h	750	600				
175	40	5.14	637625	3.72	638625	5.71	636305	225	140x110	105x80	11	70	126	750	600						
200	50	6.44	637626	4.98	638626	7.01	636306	250	140x110	105x80	11	70	126	750	600						

Heavy-duty PT brackets with hardened ball race grooves - max carrying capacity 900 daN

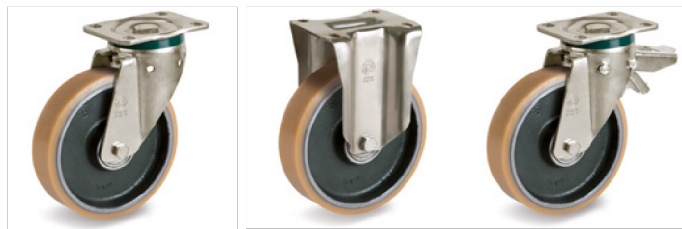

- 1) Top Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball Race Ring: electrolytically galvanised steel plate
 - 4) Dust Seal: dark green polyamide 6
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) Ball race: hardened carbon steel grooves
 - 7) King pin: steel screw, class 8.8 and stainless steel nut
- Available with rear adjustable brake


mm		kg		COD.		kg		COD.		mm		mm		mm		mm		daN		daN	
150	40	4.19	635604	2.70	638624	4.76	635304	200	140x110	105x80	11	70	126	4 km/h	6 km/h	750	600				
175	40	5.14	635605	3.72	638625	5.71	635305	225	140x110	105x80	11	70	126	850	680						
200	50	6.44	635606	4.98	638626	7.01	635306	250	140x110	105x80	11	70	126	900	800						

Options available to order:



Footguard
for brackets NL-
M-P-PT

Extra-heavy duty brackets EP - max carrying capacity 1500 daN

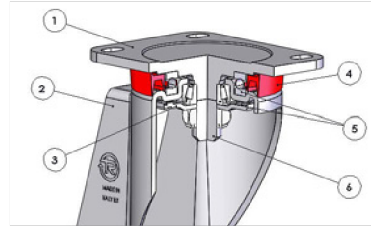

- 1) Plate: white galvanised forged steel
 - 2) Fork: white galvanised forged steel
 - 3) Lower bearing protection ring
 - 4) Dust seal: orange polyethylene
 - 5) Swivel actions: axial ball bearing and tapered roller bearing
 - 6) King pin: integrated with the machine-processed plate
- Available with adjustable total rear foot brake

mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	daN	daN	
100	30	1.85	637822	1.61	638822			140	100x85	80x60	9	46	250	200	
125	40	2.56	637823	1.70	638823			164	100x85	80x60	9	48	350	280	
150	40	4.46	637824	3.97	638824	5.03	636504	200	135x110	105x80	11	70	126	750	600
175	40	5.44	637825	5.02	638825	6.01	636505	225	135x110	105x80	11	70	126	850	680
200	50	6.75	637826	6.30	638826	7.32	636506	250	135x110	105x80	11	70	126	1100	880
250	60	13.58	637828	11.74	638828			300	175x140	140x105	14	66		1500	1200