

SERIES **66**

**"TR" POLYURETHANE WHEELS
WITH POLYAMIDE 6 CENTRE**



mm	mm	kg	COD.	mm	mm.	daN	daN	daN											
80	25	0,10	661101	12	39	225	100	150											
100	30	0,16	661102	12	44	300	135	200											
125	30	0,25	661103	15	44	400	150	250											
150	40	0,45	661104	20	59	600	240	400											
175	40	0,62	661105	20	59	680	270	470											
200	50	0,78	661106	20	59	800	300	600											
200	50	0,75	661206	25	59	800	300	600											
250	60	1,41	661108	25	88	1200	400	1000											




mm	mm	kg	COD.	kg	COD.	mm	mm	daN	daN	daN									
80	25	0,13	663101	0,13	663201	12	39	225	100	150									
100	30	0,19	663102	0,19	663202	12	44	300	135	200									
125	30	0,28	663103	0,28	663203	15	44	400	150	250									
150	40	0,54	663104	0,54	663204	20	59	600	240	400									
175	40	0,73	663105	0,73	663205	20	59	680	270	470									
200	50	0,89	663106	0,89	663206	20	59	800	300	600									
200	50	0,85	663116			25	59	800	300	600									
250	60	1,52	663108	1,52	663208	25	88	1200	400	1000									



mm	mm	kg	COD.	kg	COD.	mm	mm.	mm	mm	daN	daN	daN	daN							
80	25	0,15	662101	0,10	664101	12	32	28	10	225	100	150	120							
100	30	0,25	662102	0,15	664102	12	40	32	11,5	300	135	200	160							
125	30	0,33	662103	0,25	664103	15	40	35	13,5	400	150	250	200							
175	40	0,85	662105	0,60	664105	20	55	47	14	680	270	470	380							
200	50	1,07	662106	0,76	664106	20	55	52	15	800	300	600	480							
200	50	1,06	662126	0,76	664106	25	55	52	15	800	300	600	480							

Standard-duty brackets NL - max carrying capacity 300 daN



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Dust seal: orange polyethylene
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: integrated with the plate and cold-rieveted
- Available with total front foot brake

mm		kg		COD.		kg		COD.		mm		mm		mm		mm		mm		daN	
80	25	0,61	664201	0,37	665701	0,80	666601	107	100x85	80x60	9	37	120	150							
100	30	0,75	664202	0,44	665702	0,90	666602	128	100x85	80x60	9	35	120	200							
125	30	0,91	664203	0,66	665703	1,05	666603	156	100x85	80x60	9	37	120	220							
125PG	30	1,10	664213	0,86	665713	1,30	666643	156	140x110	105x80	11	37	120	220							
150	40	1,81	664204	1,44	665704	2,09	666604	194	140x110	105x80	11	56	156	300							
175	40	1,99	664205	1,70	665705	2,27	666605	217	140x110	105x80	11	56	156	300							
200	50	2,19	664206	1,97	665706	2,45	666606	240	140x110	105x80	11	56	156	300							

80	25	0,63	664501	0,41	665901	0,84	666621	107	100x85	80x60	9	37	120	150							
100	30	0,78	664502	0,46	665902	0,93	666622	128	100x85	80x60	9	35	120	200							
125	30	0,93	664503	0,68	665903	1,08	666623	156	100x85	80x60	9	37	120	220							
125PG	30	1,13	664513	0,89	665913	1,33	666653	156	140x110	105x80	11	37	120	220							
150	40	2,00	664504	1,53	665904	2,18	666624	194	140x110	105x80	11	56	156	300							
175	40	2,12	664505	1,79	665905	2,38	666625	217	140x110	105x80	11	56	156	300							
200	50	2,29	604506	2,08	665906	2,53	666626	240	140x110	105x80	11	56	156	300							

Options available to order



Wheel with ball bearings fitted with NL bracket



Directional lock for brackets d. 150-200 mm




Footguard for brackets NL-M-P-PT

SERIES **66**

**"TR" POLYURETHANE WHEELS
WITH POLYAMIDE 6 CENTRE**

Standard-duty brackets NL - max carrying capacity 300 daN

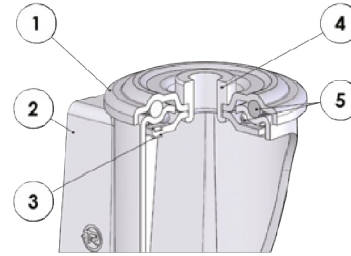

- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) King pin: bushing in electrolytically galvanised steel
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	daN				
80	25	0.54	667701	0.72	666401	107	73	12	37	120	150				
100	30	0.68	667702	0.89	666402	128	73	12	35	120	200				
125	30	0.85	667703	1.00	666403	156	73	12	37	120	220				
150	40	1.67	667704	1.96	666404	188	102	20	56	156	300				
175	40	1.86	667705	2.15	666405	212	102	20	56	156	300				
200	50	2.09	667706	2.37	666406	236	102	20	56	156	300				
80	25	0.57	667801	0.75	666421	107	73	12	37	120	150				
100	30	0.71	667802	0.91	666422	128	73	12	35	120	200				
125	30	0.88	667803	1.03	666423	156	73	12	37	120	220				
150	40	1.76	667804	2.05	666424	188	102	20	56	156	300				
175	40	1.97	667805	2.26	666425	212	102	20	56	156	300				
200	50	2.20	667806	2.48	666426	236	102	20	56	156	300				

Options available to order




Wheel with ball bearings fitted with NL bracket



Footguard for brackets NL-M-P-PT

Stainless steel standard-duty brackets NLX - max carrying capacity 300 daN



INOX


- 1) Plate: AISI 304 stainless steel
 - 2) Fork: AISI 304 stainless steel
 - 3) Ball race ring: AISI 304 stainless steel
 - 4) Dust seal: orange polyethylene
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: integrated with the plate and cold-rieveted
- Available with total front foot brake

mm		mm		kg		CODE		kg		CODE		kg		CODE		mm		mm		mm		mm		mm		daN		
80	25	0.60	664401	0.34	665401	0.77	666701	107	100x85	80x60	9	37	120	150														
100	30	0.66	664402	0.41	665402	0.84	666702	128	100x85	80x60	9	35	120	200														
125	30	0.81	664403	0.64	665403	0.95	666703	156	100x85	80x60	9	37	120	220														
150	40	1.75	664404	1.31	665404	2.04	666704	194	140x110	105x80	11	56	156	300														
175	40	1.93	664405	1.49	665405	2.21	666705	215	140x110	105x80	11	56	156	300														
200	50	2.16	664406	1.70	665406	2.44	666706	240	140x110	105x80	11	56	156	300														
80	25	0.64	664601	0.38	665601	0.81	666721	107	100x85	80x60	9	37	120	150														
100	30	0.68	664602	0.44	665602	0.87	666722	128	100x85	80x60	9	35	120	200														
125	30	0.84	664603	0.67	665603	0.98	666723	156	100x85	80x60	9	37	120	220														
150	40	1.84	664604	1.40	665604	2.13	666724	194	140x110	105x80	11	56	156	300														
175	40	2.04	664605	1.60	665605	2.32	666725	215	140x110	105x80	11	56	156	300														
200	50	2.27	664606	1.81	665606	2.55	666726	240	140x110	105x80	11	56	156	300														

"TR" POLYURETHANE WHEELS WITH POLYAMIDE 6 CENTRE

Stainless steel standard-duty brackets NLX - max carrying capacity 300 daN


INOX



- 1) Plate: AISI 304 stainless steel
 - 2) Fork: AISI 304 stainless steel
 - 3) Ball race ring: AISI 304 stainless steel
 - 4) King pin: bushing in stainless steel
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

mm		mm		kg		CODE		kg		CODE		mm		mm		mm		mm		mm		daN	
80	25	0.54	667901	0.71	668801	107	73	12	37	120	150												
100	30	0.62	667902	0.83	668802	128	73	12	35	120	200												
125	30	0.79	667903	0.94	668803	156	73	12	37	120	220												
150	40	1.55	667904	1.83	668804	188	102	20	56	156	300												
175	40	1.74	667905	2.02	668805	212	102	20	56	156	300												
200	50	2.10	667906	2.36	668806	236	102	20	56	156	300												
80	25	0.58	668001	0.75	668821	107	73	12	37	120	150												
100	30	0.65	668002	0.85	668822	128	73	12	35	120	200												
125	30	0.82	668003	0.97	668823	156	73	12	37	120	220												
150	40	1.64	668004	1.32	668824	188	102	20	56	156	300												
175	40	1.85	668005	2.13	668825	212	102	20	56	156	300												
200	50	2.21	668006	2.47	668826	236	102	20	56	156	300												

Medium-duty brackets M - max carrying capacity 500 daN



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Dust seal: blue polyethylene
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: integrated with the plate and cold-rieveted
- Available with adjustable total front foot brake

mm		mm		kg		CODE		kg		CODE		kg		CODE		mm		mm		mm		mm		mm		daN		
150	40	2.16	664304	1.44	665704	2.62	668704	194	140x110	105x80	11	58	178	400														
200	50	2.58	664306	1.97	665706	3.00	668706	240	140x110	105x80	11	50	178	500														
150	40	2.35	664804	1.53	665904	2.71	668904	194	140x110	105x80	11	58	178	400														
200	50	2.68	664806	2.08	665906	3.08	668906	240	140x110	105x80	11	50	178	500														
200	50	2.93	665306	2.32	665806	3.35	669206	240	140x110	105x80	11	50	178	500														

Options available to order




Footguard for brackets NL-M-P-PT

SERIES **66**


**"TR" POLYURETHANE WHEELS
WITH POLYAMIDE 6 CENTRE**

Medium-heavy duty brackets P - max carrying capacity 600 daN



- 1) Plate: galvanised colonial steel plate
 - 2) Fork: galvanised colonial steel plate
 - 3) Ball race ring: galvanised colonial steel plate
 - 4) Dust seal: orange polyamide
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: steel bolt in grade 8.8 steel and steel nut
- Available with total front foot brake

mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN
100	30	1.04	667102	0.55	668102	1.19	669002	138	100x85	80x60	9	46	123	200
125	30	1.17	667103	0.75	668103	1.31	669003	161	100x85	80x60	9	44	123	250
100	30	1.08	667302	0.58	668302	1.22	669102	138	100x85	80x60	9	46	123	200
125	30	1.20	667303	0.78	668303	1.34	669103	161	100x85	80x60	9	44	123	250



- 1) Plate: galvanised colonial steel plate
 - 2) Fork: galvanised colonial steel plate
 - 3) Ball race ring: galvanised colonial steel plate
 - 4) Dust seal: orange polyamide
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: steel bolt in grade 8.8 steel and steel nut
- Available with adjustable total rear foot brake

mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN
150	40	2.79	667604	1.37	668604	3.36	669004	200	140x110	105x80	11	70	126	400
175	40	3.01	667605	1.58	668605	3.57	669005	225	140x110	105x80	11	70	126	470
200	50	3.25	667606	1.79	668606	3.82	669006	250	140x110	105x80	11	70	126	600
150	40	2.89	667504	1.46	668504	3.46	669104	200	140x110	105x80	11	70	126	400
175	40	3.11	667505	1.69	668505	3.68	669105	225	140x110	105x80	11	70	126	470
200	50	3.36	667506	1.90	668506	3.93	669106	250	140x110	105x80	11	70	126	600

Options available to order



Wheel with ball bearings fitted with P bracket




Directional lock for brackets d. 150-200 mm



Footguard for brackets NL-M-P-PT

Stainless steel medium-heavy duty brackets PX - max carrying capacity 600 daN



INOX

- 1) Plate: AISI 304 stainless steel
 - 2) Fork: AISI 304 stainless steel
 - 3) Ball race ring: AISI 304 stainless steel
 - 4) Dust seal: orange polyamide
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: screw and nut in stainless steel
- Available with adjustable total rear foot brake

mm	mm	kg	CODE	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	mm	daN
150	40	2.75	667004	1.36	667114	3.32	667214	200	140x110	105x80	11	70	126	400
175	40	2.95	667005	1.56	667115	3.52	667215	225	140x110	105x80	11	70	126	470
200	50	3.20	667006	1.76	667116	3.77	667216	250	140x110	105x80	11	70	126	600
150	40	2.77	667314	1.55	667414	3.34	667514	200	140x110	105x80	11	70	126	400
175	40	3.09	667315	1.69	667415	3.66	667515	225	140x110	105x80	11	70	126	470
200	50	3.30	667316	1.87	667416	3.87	667516	250	140x110	105x80	11	70	126	600