

SERIES **71**

GREY NON-MARKING THERMOPLASTIC RUBBER WHEELS WITH POLYPROPYLENE CENTRE



| mm | mm | kg | COD. | mm | mm | daN | daN | daN | | | | | | | | | | | |
|-----|----|------|--------|----|----|------------|------------|------------|--|--|--|--|--|--|--|--|--|--|--|
| 80 | 30 | 0,09 | 711101 | 12 | 39 | 100 | 70 | 70 | | | | | | | | | | | |
| 100 | 30 | 0,12 | 711102 | 12 | 44 | 150 | 100 | 100 | | | | | | | | | | | |
| 100 | 30 | 0,11 | 711132 | 12 | 39 | 150 | 100 | 100 | | | | | | | | | | | |
| 125 | 35 | 0,20 | 711103 | 15 | 44 | 180 | 120 | 120 | | | | | | | | | | | |
| 125 | 35 | 0,20 | 711133 | 12 | 39 | 180 | 120 | 120 | | | | | | | | | | | |
| 150 | 35 | 0,27 | 711105 | 15 | 44 | 210 | 140 | 140 | | | | | | | | | | | |
| 150 | 45 | 0,36 | 711104 | 20 | 59 | 270 | 180 | 180 | | | | | | | | | | | |
| 200 | 50 | 0,70 | 711106 | 20 | 59 | 330 | 225 | 225 | | | | | | | | | | | |




| mm | mm | kg | COD. | kg | COD. | mm | mm | daN | daN | daN | | | | | | | | | |
|-----|----|------|--------|------|--------|----|----|------------|------------|------------|--|--|--|--|--|--|--|--|--|
| 80 | 30 | 0,11 | 713101 | 0,11 | 713201 | 12 | 39 | 100 | 70 | 70 | | | | | | | | | |
| 100 | 30 | 0,14 | 713102 | 0,14 | 713202 | 12 | 44 | 150 | 100 | 100 | | | | | | | | | |
| 125 | 35 | 0,22 | 713103 | 0,22 | 713203 | 15 | 44 | 180 | 120 | 120 | | | | | | | | | |
| 150 | 35 | 0,30 | 713105 | 0,30 | 713205 | 15 | 44 | 210 | 140 | 140 | | | | | | | | | |
| 150 | 45 | 0,41 | 713104 | 0,41 | 713204 | 20 | 59 | 270 | 180 | 180 | | | | | | | | | |
| 200 | 50 | 0,74 | 713106 | 0,74 | 713206 | 20 | 59 | 330 | 225 | 225 | | | | | | | | | |




| mm | mm | kg | COD. | kg | COD. | mm | mm | daN | daN | daN | | | | | | | | | |
|-----|----|------|--------|------|--------|----|----|------------|------------|------------|--|--|--|--|--|--|--|--|--|
| 80 | 30 | 0,14 | 712201 | | | 8 | 40 | 100 | 70 | 70 | | | | | | | | | |
| 100 | 30 | 0,18 | 712202 | | | 8 | 45 | 150 | 100 | 100 | | | | | | | | | |
| 125 | 35 | 0,25 | 712203 | | | 8 | 45 | 180 | 120 | 120 | | | | | | | | | |
| 150 | 45 | 0,62 | 712204 | 0,62 | 712404 | 12 | 60 | 270 | 180 | 180 | | | | | | | | | |
| 160 | 50 | 0,71 | 712210 | 0,71 | 712410 | 12 | 60 | 300 | 200 | 200 | | | | | | | | | |
| 200 | 50 | 0,92 | 712206 | 0,92 | 712406 | 12 | 60 | 330 | 225 | 225 | | | | | | | | | |

Light-duty brackets SL - max carrying capacity 120 daN



- 1) Plate in electrolytically galvanised printed steel plate
 - 2) Fork in electrolytically galvanised printed steel plate
 - 3) Ball Race Ring in electrolytically galvanised printed steel plate
 - 4) Swivel actions: on two ball race rings lubricated with grease
 - 5) Bracket closing king pin integrated with ball race ring
- Available with total front foot brake

| mm | | kg | COD. | kg | COD. | kg | COD. | mm | mm | mm | mm | mm | mm | mm | mm | daN |
|-----|----|------|--------|------|--------|------|--------|-----|-------|--------|-------|-----|----|-----|------------|-----|
| 80 | 30 | 0,43 | 715801 | 0,42 | 716001 | 0,55 | 716301 | 110 | 95x80 | 100x85 | 80x60 | 8,8 | 33 | 120 | 70 | |
| 100 | 30 | 0,46 | 715802 | 0,45 | 716002 | 0,60 | 716302 | 127 | 95x80 | 100x85 | 80x60 | 8,8 | 29 | 120 | 100 | |
| 125 | 35 | 0,63 | 715803 | 0,61 | 716003 | 0,74 | 716303 | 154 | 95x80 | 100x85 | 80x60 | 8,8 | 32 | 120 | 120 | |



- 1) Plate in electrolytically galvanised printed steel plate
 - 2) Fork in electrolytically galvanised printed steel plate
 - 3) Ball Race Ring in electrolytically galvanised printed steel plate
 - 4) Bracket closing king pin integrated with ball race ring
 - 5) Swivel actions: on two ball race rings lubricated with grease
- Available with total front foot brake

| mm | | kg | COD. | kg | COD. | mm | mm | mm | mm | mm | daN |
|-----|----|------|--------|------|--------|-----|----|----|----|-----|------------|
| 80 | 30 | 0,38 | 716101 | 0,48 | 716201 | 110 | 63 | 12 | 33 | 120 | 70 |
| 100 | 30 | 0,41 | 716102 | 0,52 | 716202 | 127 | 63 | 12 | 29 | 120 | 100 |
| 125 | 30 | 0,57 | 716103 | 0,67 | 716203 | 154 | 63 | 12 | 32 | 120 | 120 |

Options available to order:




Wheel for large commercial kitchens (conforms to Standard DIN 18867-8)
d. 160 and 200 mm



Wheel with single stainless steel ball bearing
d. 80-125 mm

GREY NON-MARKING THERMOPLASTIC RUBBER WHEELS WITH POLYPROPYLENE CENTRE

Standard-duty brackets NL - max carrying capacity 225 daN



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Dust seal: orange polyethylene
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake

| mm | | kg | COD. | kg | COD. | kg | COD. | mm | | | | | | daN | 4 km/h |
|-----|----|------|--------|------|--------|------|--------|-----|---------|--------|----|----|-----|------------|--------|
| 80 | 30 | 0,60 | 714201 | 0,36 | 715701 | 0,79 | 716601 | 107 | 100x85 | 80x60 | 9 | 37 | 120 | 70 | |
| 100 | 30 | 0,70 | 714202 | 0,39 | 715702 | 0,85 | 716602 | 128 | 100x85 | 80x60 | 9 | 35 | 120 | 100 | |
| 125 | 35 | 0,86 | 714203 | 0,61 | 715703 | 1,00 | 716603 | 156 | 100x85 | 80x60 | 9 | 37 | 120 | 120 | |
| 150 | 35 | 0,96 | 714204 | 0,76 | 715704 | 1,14 | 716604 | 182 | 100x85 | 80x60 | 9 | 34 | 120 | 140 | |
| 150 | 45 | 1,72 | 714211 | 1,35 | 715711 | 2,00 | 716611 | 194 | 140x110 | 105x80 | 11 | 56 | 156 | 180 | |
| 200 | 50 | 2,07 | 714206 | 1,86 | 715706 | 2,35 | 716606 | 240 | 140x110 | 105x80 | 11 | 56 | 156 | 225 | |
| 80 | 30 | 0,61 | 714501 | 0,38 | 715901 | 0,82 | 716621 | 107 | 100x85 | 80x60 | 9 | 37 | 120 | 70 | |
| 100 | 30 | 0,71 | 714502 | 0,39 | 715902 | 0,86 | 716622 | 128 | 100x85 | 80x60 | 9 | 35 | 120 | 100 | |
| 125 | 35 | 0,87 | 714503 | 0,62 | 715903 | 1,03 | 716623 | 156 | 100x85 | 80x60 | 9 | 37 | 120 | 120 | |
| 150 | 35 | 1,11 | 714504 | 0,81 | 715904 | 1,16 | 716624 | 182 | 100x85 | 80x60 | 9 | 34 | 120 | 140 | |
| 150 | 45 | 1,87 | 714511 | 1,40 | 715911 | 2,05 | 716631 | 194 | 140x110 | 105x80 | 11 | 56 | 156 | 180 | |
| 200 | 50 | 2,10 | 714506 | 2,02 | 715906 | 2,34 | 716626 | 240 | 140x110 | 105x80 | 11 | 56 | 156 | 225 | |
| 80 | 30 | 0,58 | 714701 | 0,45 | 714801 | 0,75 | 714901 | 107 | 100x85 | 80x60 | 9 | 37 | 120 | 70 | |
| 100 | 30 | 0,64 | 714702 | 0,50 | 714802 | 0,81 | 714902 | 128 | 100x85 | 80x60 | 9 | 35 | 120 | 100 | |
| 125 | 35 | 0,81 | 714703 | 0,61 | 714803 | 0,97 | 714903 | 156 | 100x85 | 80x60 | 9 | 37 | 120 | 120 | |
| 150 | 45 | 1,86 | 714731 | 1,68 | 714811 | 2,15 | 714911 | 194 | 140x110 | 105x80 | 11 | 56 | 156 | 180 | |
| 160 | 50 | 1,95 | 714710 | 1,77 | 714810 | 2,24 | 714910 | 199 | 140x110 | 105x80 | 11 | 56 | 156 | 200 | |
| 200 | 50 | 2,22 | 714736 | 2,13 | 714806 | 2,51 | 714906 | 240 | 140x110 | 105x80 | 11 | 56 | 156 | 225 | |

Options available to order:



Bracket with directional lock d. 80-125 mm




Directional lock for brackets d. 150-200 mm



Wheel for large commercial kitchens (conforms to Standard DIN 18867-8) d. 160 and 200 mm

Standard-duty brackets NL - max carrying capacity 225 daN



- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) King pin: bushing in electrolytically galvanised steel
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

| Wheel | | Fork | | Ball race ring | | King pin | | Swivel actions | | Total front foot brake | | Speed | |
|-------|----|------|--------|----------------|--------|----------|-----|----------------|----|------------------------|------------|-------|--|
| mm | mm | kg | COD. | kg | COD. | mm | mm | mm | mm | mm | daN | | |
| 80 | 30 | 0,53 | 717401 | 0,71 | 716501 | 107 | 73 | 12 | 37 | 120 | 70 | | |
| 100 | 30 | 0,63 | 717402 | 0,84 | 716502 | 128 | 73 | 12 | 35 | 120 | 100 | | |
| 125 | 35 | 0,80 | 717403 | 0,95 | 716503 | 156 | 73 | 12 | 37 | 120 | 120 | | |
| 150 | 35 | 0,90 | 717404 | 1,04 | 716504 | 182 | 73 | 12 | 34 | 120 | 140 | | |
| 150 | 45 | 1,58 | 717411 | 1,87 | 716511 | 188 | 102 | 20 | 56 | 156 | 180 | | |
| 200 | 50 | 1,97 | 717406 | 2,26 | 716506 | 236 | 102 | 20 | 56 | 156 | 225 | | |
| 80 | 30 | 0,55 | 717801 | 0,73 | 716521 | 107 | 73 | 12 | 37 | 120 | 70 | | |
| 100 | 30 | 0,64 | 717802 | 0,84 | 716522 | 128 | 73 | 12 | 35 | 120 | 100 | | |
| 125 | 35 | 0,82 | 717803 | 0,98 | 716523 | 156 | 73 | 12 | 37 | 120 | 120 | | |
| 150 | 35 | 0,93 | 717804 | 1,00 | 716524 | 182 | 73 | 12 | 34 | 120 | 140 | | |
| 150 | 45 | 1,85 | 717811 | 1,92 | 716531 | 188 | 102 | 20 | 56 | 156 | 180 | | |
| 200 | 50 | 2,02 | 717806 | 2,29 | 716526 | 236 | 102 | 20 | 56 | 156 | 225 | | |
| 80 | 30 | 0,53 | 714301 | 0,70 | 715501 | 107 | 73 | 12 | 37 | 120 | 70 | | |
| 100 | 30 | 0,58 | 714302 | 0,75 | 715502 | 128 | 73 | 12 | 35 | 120 | 100 | | |
| 125 | 35 | 0,74 | 714303 | 0,94 | 715503 | 156 | 73 | 12 | 37 | 120 | 120 | | |
| 150 | 45 | 1,74 | 714331 | 2,06 | 715511 | 188 | 102 | 20 | 56 | 156 | 180 | | |
| 160 | 50 | 1,83 | 714310 | 2,15 | 715510 | 193 | 102 | 20 | 56 | 156 | 200 | | |
| 200 | 50 | 2,11 | 714336 | 2,41 | 715506 | 236 | 102 | 20 | 56 | 156 | 225 | | |

Options available to order:



Wheel for large commercial kitchens (conforms to Standard DIN 18867-8) d. 160 and 200 mm




Fitting with threaded stem



Fitting with unthreaded stem with dimensions that can be customised

GREY NON-MARKING THERMOPLASTIC RUBBER WHEELS WITH POLYPROPYLENE CENTRE

Standard-duty brackets NL - max carrying capacity 225 daN




- 1) Plate: electrolytically galvanised steel plate
 - 2) Fork: electrolytically galvanised steel plate
 - 3) Ball race ring: electrolytically galvanised steel plate
 - 4) Stem: zamak expander
 - 5) King pin: bushing in electrolytically galvanised steel
 - 6) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

| mm | mm | kg | COD. | kg | COD. | mm | mm | mm | mm | mm | mm | daN | | |
|-----|----|------|--------|------|--------|-----|----|----|-------|----|-----|------------|--|--|
| 80 | 30 | 0,65 | 719201 | 0,83 | 719301 | 109 | 20 | 65 | 20-24 | 37 | 120 | 70 | | |
| 100 | 30 | 0,75 | 719202 | 0,96 | 719302 | 130 | 20 | 65 | 20-24 | 35 | 120 | 100 | | |
| 125 | 35 | 1,02 | 719203 | 1,07 | 719303 | 158 | 20 | 65 | 20-24 | 37 | 120 | 120 | | |

Stainless steel standard-duty brackets NLX - max carrying capacity 225 daN


INOX



- 1) Plate: AISI 304 stainless steel
 - 2) Fork: AISI 304 stainless steel
 - 3) Ball race ring: AISI 304 stainless steel
 - 4) Dust seal: orange polyethylene
 - 5) Swivel actions: double ball ring with grease lubrication
 - 6) King pin: integrated with the plate and cold-riveted
- Available with total front foot brake

| mm | mm | kg | COD. | kg | COD. | kg | COD. | mm | mm | mm | mm | mm | mm | daN |
|-----|----|------|--------|------|--------|------|--------|-----|---------|--------|----|----|-----|------------|
| 80 | 30 | 0,59 | 714401 | 0,33 | 715301 | 0,76 | 716701 | 107 | 100x85 | 80x60 | 9 | 37 | 120 | 70 |
| 100 | 30 | 0,61 | 714402 | 0,36 | 715302 | 0,79 | 716702 | 128 | 100x85 | 80x60 | 9 | 35 | 120 | 100 |
| 125 | 35 | 0,76 | 714403 | 0,59 | 715303 | 0,90 | 716703 | 156 | 100x85 | 80x60 | 9 | 37 | 120 | 120 |
| 150 | 35 | 0,99 | 714404 | 0,76 | 715304 | 1,01 | 716704 | 182 | 100x85 | 80x60 | 9 | 34 | 120 | 140 |
| 150 | 45 | 1,63 | 714411 | 1,22 | 715311 | 1,95 | 716711 | 194 | 140x110 | 105x80 | 11 | 56 | 156 | 180 |
| 200 | 50 | 2,04 | 714406 | 1,59 | 715306 | 2,33 | 716706 | 240 | 140x110 | 105x80 | 11 | 56 | 156 | 225 |
| 80 | 30 | 0,61 | 714601 | 0,36 | 715601 | 0,79 | 716721 | 107 | 100x85 | 80x60 | 9 | 37 | 120 | 70 |
| 100 | 30 | 0,64 | 714602 | 0,37 | 715602 | 0,80 | 716722 | 128 | 100x85 | 80x60 | 9 | 35 | 120 | 100 |
| 125 | 35 | 0,78 | 714603 | 0,62 | 715603 | 0,93 | 716723 | 156 | 100x85 | 80x60 | 9 | 37 | 120 | 120 |
| 150 | 35 | 1,03 | 714604 | 0,81 | 715604 | 1,03 | 716724 | 182 | 100x85 | 80x60 | 9 | 34 | 120 | 140 |
| 150 | 45 | 1,71 | 714611 | 1,27 | 715611 | 2,00 | 716731 | 194 | 140x110 | 105x80 | 11 | 56 | 156 | 180 |
| 200 | 50 | 2,09 | 714606 | 1,62 | 715606 | 2,36 | 716726 | 240 | 140x110 | 105x80 | 11 | 56 | 156 | 225 |
| 150 | 45 | 1,85 | 715411 | 1,55 | 715011 | 2,14 | 716911 | 194 | 140x110 | 105x80 | 11 | 56 | 156 | 180 |
| 160 | 50 | 1,94 | 715410 | 1,64 | 715010 | 2,23 | 716910 | 199 | 140x110 | 105x80 | 11 | 56 | 156 | 200 |
| 200 | 50 | 2,22 | 715406 | 1,97 | 715036 | 2,51 | 716906 | 240 | 140x110 | 105x80 | 11 | 56 | 156 | 225 |

Stainless steel standard-duty brackets NLX - max carrying capacity 225 daN

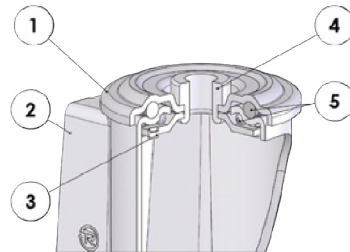

INOX

- 1) Plate: AISI 304 stainless steel
 - 2) Fork: AISI 304 stainless steel
 - 3) Ball race ring: AISI 304 stainless steel
 - 4) King pin: bushing in stainless steel
 - 5) Swivel actions: double ball ring with grease lubrication
- Available with total front foot brake

| mm | | kg | COD. | kg | COD. | mm | | | | | daN | | | |
|-----|----|------|--------|------|--------|-----|-----|----|----|-----|------------|--|--|--|
| 80 | 30 | 0,53 | 717901 | 0,70 | 718801 | 107 | 73 | 12 | 37 | 120 | 70 | | | |
| 100 | 30 | 0,57 | 717902 | 0,78 | 718802 | 128 | 73 | 12 | 35 | 120 | 100 | | | |
| 125 | 35 | 0,74 | 717903 | 0,89 | 718803 | 156 | 73 | 12 | 37 | 120 | 120 | | | |
| 150 | 35 | 0,95 | 717904 | 0,97 | 718804 | 182 | 73 | 12 | 34 | 120 | 140 | | | |
| 150 | 45 | 1,46 | 717911 | 1,74 | 718811 | 188 | 102 | 20 | 56 | 156 | 180 | | | |
| 200 | 50 | 1,99 | 717906 | 2,25 | 718806 | 236 | 102 | 20 | 56 | 156 | 225 | | | |
| 80 | 30 | 0,56 | 718001 | 0,73 | 718821 | 107 | 73 | 12 | 37 | 120 | 70 | | | |
| 100 | 30 | 0,58 | 718002 | 0,78 | 718822 | 128 | 73 | 12 | 35 | 120 | 100 | | | |
| 125 | 35 | 0,77 | 718003 | 0,92 | 718823 | 156 | 73 | 12 | 37 | 120 | 120 | | | |
| 150 | 35 | 1,00 | 718004 | 0,99 | 718824 | 182 | 73 | 12 | 34 | 120 | 140 | | | |
| 150 | 45 | 1,51 | 718011 | 1,79 | 718831 | 188 | 102 | 20 | 56 | 156 | 180 | | | |
| 200 | 50 | 2,02 | 718006 | 2,28 | 718826 | 236 | 102 | 20 | 56 | 156 | 225 | | | |
| 150 | 45 | 1,71 | 716311 | 2,06 | 716541 | 188 | 102 | 20 | 56 | 156 | 180 | | | |
| 160 | 50 | 1,80 | 716310 | 2,15 | 716510 | 193 | 102 | 20 | 56 | 156 | 200 | | | |
| 200 | 50 | 2,11 | 716336 | 2,41 | 716546 | 236 | 102 | 20 | 56 | 156 | 225 | | | |

Options available to order:



Wheel with single stainless steel ball bearing d. 80-125 mm



Wheel for large commercial kitchens (conforms to Standard DIN 18867-8) d. 160 and 200 mm