


EUROCORD®

VAPORE ARMATO



TUBE: EPDM rubber, resistant to saturated steam.
REINFORCEMENT: high tensile steel wire cords.
COVER: abrasion, heat, steam, oil, ozone and weather resistant. Pinpricked special synthetic rubber.
APPLICATION: for saturated steam services at a maximum working pressure of 17 bars (247 psi) in chemical plants, Steel mill, refineries. Shipyards and all industries.
SURFACE: smooth with fabric impression.

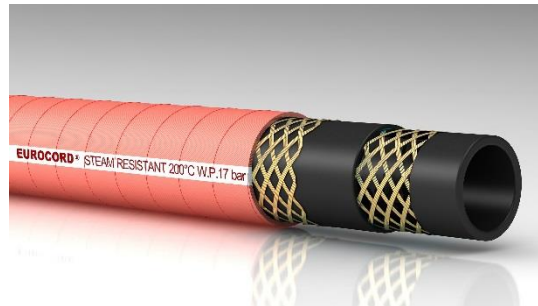

SEELE: EPDM gummi, sattdampfbeständig.
EINLAGE: hochzugfeste stahlkordeinlage.
DECKE: abriebfest, hitze-, dampf-, öl- ozon- und witterungsbeständigsspeziell geprickter synthetischer gummi.
ANWENDUNG: geeignet für anwendungen mit sattdampf mit max. 17 bar (247 psi) für chemieindustrie, stahlwerke, raffinerien, werften und allen industriebereichen.
OBERFLÄCHE: stoffimpression.



SUSTRATO: caucho en EPDM resistente a el vapor saturado
REFUERZO: cuerdas de acero a alta tenacidad.
COBERTURA: caucho especial sintético, resistente al aceite, al calor, a la abrasión, al ozono y a los agentes atmosfericos.
USO: vapor saturado a un ejercicio de presion maxima de 17 bares, 247 psi. usado en los astilleros, en las instalaciones químicas, en las refinarias etc.
SUPERFICIE: con impresión de tela.



TUBE: caoutchouc EPDM resistant a la vapeur saturee.
REINFORCEMENT: nappes metalliques haute tenacite.
REVELEMENT: caoutchouc synthetique special micro-perfore. Resistant a l'abrasion, a la chaleur, a la vapeur, aux huiles, a l'ozone et aux agents atmosferiques.
APPLICATION : pour la vapeur saturee avec une pression maximale de 17 bar (247 ps1) dans l'industrie chimique, les acieries, les raffineries, les chantiers navals etc.
SURFACE: impression textile

							
mm	mm	bar	bar	bar	gr/mt	mm	mt
10	21	17	170	-	450	180	40
13	25	17	170	-	651	156	40
19	32	17	170	-	730	228	40
25	38	17	170	-	926	305	40
32	46	17	170	-	1612	386	40
38	54	17	170	-	2812	456	40
51	67	17	170	-	2419	610	40

TEMPERATURE, TEMPERATUR, TEMPERATURA, TEMPERATURE: - 40°C / +208°C
 -40°F / +406°F

NORMS, NORMEN. NORMAS, NORMES: ISO 1307

MARKING / BESCHRIFTUNG / MARCATURA / MARQUAGE: EUROCORD® STEAM RESISTANT 200°C W.P.17 BAR

SATI GROUP S.P.A.

Via C. Bonazzi, 24 - 40013 CASTEL MAGGIORE (BO) - ITALY

Tel. +39.051.700321 - Fax +39.051.701350

E-mail: commerciale@satigroup.it

web: www.satigroup.it