




HOME COMPANY PRESENTATION CONTACT OFFER ADVICE

WELDING HOSE - TWIN ISO/EN

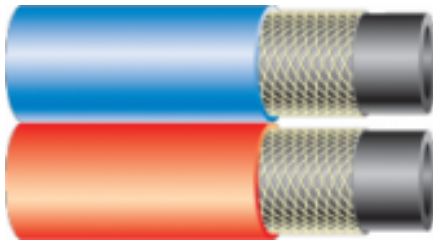

- assigned to flow of: blue - oxygen, red - acetylene, in welding, metal cutting and in similar methods
- working temp.: from -30°C up to +70°C
- tube: SBR/NR, black, smooth
- reinforcement: textile
- cover: NR/EPDM, blue and red, smooth, resistant to atmospheric factors

Inside diameter mm		Wall thickness (approx.) mm		Working pressure MPa	Bursting pressure MPa	Length max m
PN-EN ISO 3821 / PN-EN-559						
4	4	3,5	3,5	2	6	50
5	5	3,5	3,5	2	6	50
6,3	8	4,4	3,5	2	6	50
6,3	6,3	3,5	3,5	2	6	50
6,3	9	4,8	3,5	2	6	50
8	8	3,5	3,5	2	6	50
9	9	3,5	3,5	2	6	50
10	10	3,5	3,5	2	6	50