

HANDLE WITH STAINLESS STEEL TUBE D. 30 WITH VERTICAL ENDS

B350 CIN



PA6
+GF

UL94
HB



INOX

Materials:

- (1) Reinforced polyamide for support for tube, Oils and greases resistant.
- (2) Tube on stainless steel AISI 304.
- (3) Turned round aluminium insert with threaded hole M08 for fastening TCCE screw.
- (4) Stainless steel screw TCCE M08x70 ASI 303 (DIN 912).
- (5) Winged snap-fit LDPE cap.

Surfaces:

- (1-5) Satin.
- (2) Glossy natural

Colours:


- (1-5) Black (RAL 9011).
- (2) Natural steel.

NOTE: The handle is supplied unassembled in single packs.



SPECIAL REQUEST:

- None.

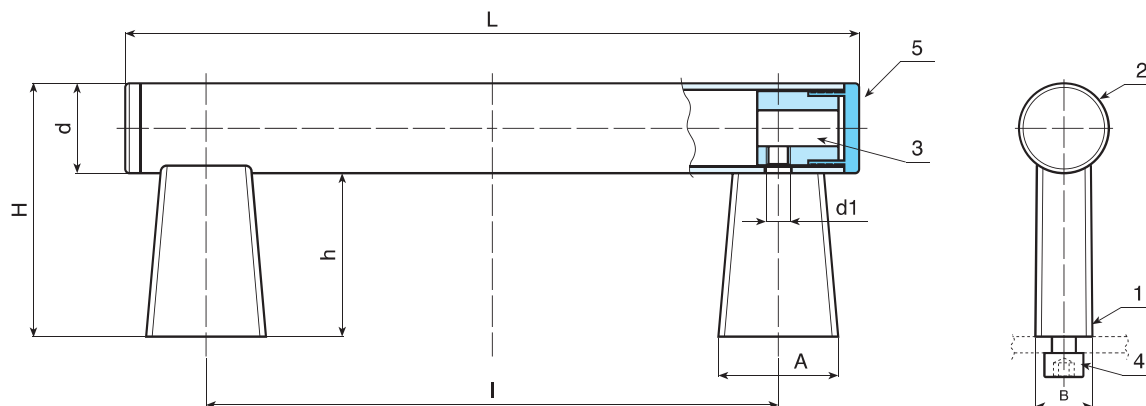

art.	l	L	D	H	h	A	B	d1	Δ g
● B350150.TG3001CIN	150	206	30	85	55	40	19	M08	395
● B350200.TG3001CIN	200	256	30	85	55	40	19	M08	447
● B350250.TG3001CIN	250	306	30	85	55	40	19	M08	500
● B350300.TG3001CIN	300	356	30	85	55	40	19	M08	550
● B350350.TG3001CIN	350	406	30	85	55	40	19	M08	602
● B350400.TG3001CIN	400	456	30	85	55	40	19	M08	654
● B350500.TG3001CIN	500	556	30	85	55	40	19	M08	756
● B350600.TG3001CIN	600	656	30	85	55	40	19	M08	862
● B350700.TG3001CIN	700	756	30	85	55	40	19	M08	966

Presumable presence in the stock in %

(☐) 90%(●) 40%(●) 5%(●)

BOTECO® - © All right reserved - www.boteco.it
Any unauthorized reproduction is strictly forbidden



BOTECO

B - 23

B - HANDLES

ver. BUK.14-0616

B350



PA6
+GF

UL94
HB



HANDLE WITH TUBE Ø. 30 SILVER WITH VERTICAL ENDS

Materials:

- (1) Reinforced polyamide for support for tube, Oils and greases resistant.
- (2) Anodised aluminium alloy 6060 tube.
- (3) Turned round aluminium insert with threaded hole M08 for fastening TCCE screw.
- (4) Black oxide threaded screw TCCE M08x70 (DIN 912).
- (5) Winged snap-fit LDPE tube cap.

Surfaces:

- (1-5) Satin.
- (2) Shiny anodised.


Colours:

- (1-5) Black (RAL 9011).
- (2) Silver anodised.

NOTE: The handle is supplied unassembled in single packs.

SPECIAL REQUEST:

- None.

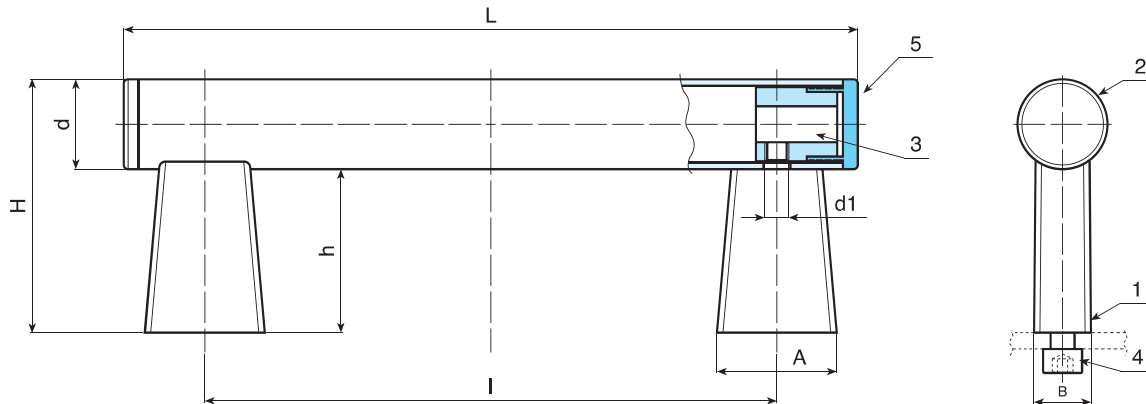

art.	l	L	D	H	h	A	B	d1	g
B350150.TG300199	150	206	30	85	55	40	19	M08	270
B350200.TG300199	200	256	30	85	55	40	19	M08	290
B350250.TG300199	250	306	30	85	55	40	19	M08	309
B350300.TG300199	300	356	30	85	55	40	19	M08	327
B350350.TG300199	350	406	30	85	55	40	19	M08	345
B350400.TG300199	400	456	30	85	55	40	19	M08	363
B350500.TG300199	500	556	30	85	55	40	19	M08	400
B350600.TG300199	600	656	30	85	55	40	19	M08	436
B350700.TG300199	700	756	30	85	55	40	19	M08	473

